

TIPO 110



Sello mecánico con muelle de ballesta, no equilibrado, sentido de rotación independiente.

LIMITES OPERATIVOS

Presión: 10 Kg/cm²
 Velocidad: 20 m/seg
 Temperatura: -20 a 200°C

MATERIALES

Caras de roce: Carburo de silicio
 Elastómeros: FKM
 Piezas metálicas: Acero Inoxidable 316

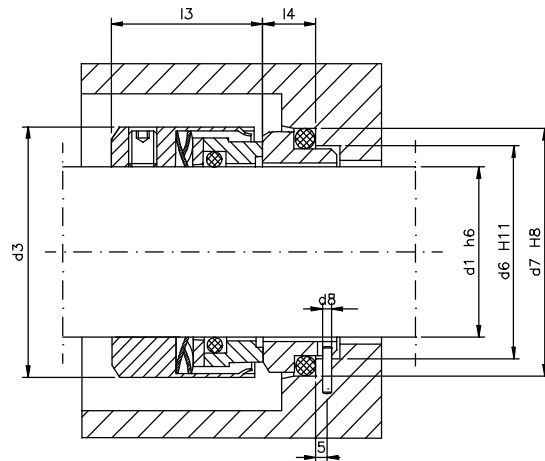


TABLA DIMENSIONAL

Ref.	d ₁	d ₇	d ₆	d ₃	d ₈	L ₃	L ₄
14	14	25	21	25	3	25.0	10.0
16	16	27	23	27	3	25.0	10.0
18	18	33	27	33	3	26.0	11.5
20	20	35	29	35	3	26.0	11.5
22	22	37	31	37	3	26.0	11.5
24	24	39	33	39	3	28.5	11.5
25	25	40	34	40	3	28.5	11.5
28	28	43	37	43	3	31.0	11.5
30	30	45	39	45	3	31.0	11.5
32	32	48	42	47	3	31.0	11.5
33	33	48	42	48	3	31.0	11.5
35	35	50	44	50	3	31.0	11.5
38	38	56	49	55	4	31.0	14.0
40	40	58	51	57	4	31.0	14.0
43	43	61	54	60	4	31.0	14.0
45	45	63	56	62	4	31.0	14.0
48	48	66	59	65	4	31.0	14.0
50	50	70	62	67	4	32.5	15.0
53	53	73	65	70	4	32.5	15.0
55	55	75	67	72	4	32.5	15.0
58	58	78	70	79	4	37.5	15.0
60	60	80	72	81	4	37.5	15.0
63	63	83	75	84	4	37.5	15.0
65	65	85	77	86	4	37.5	15.0
68	68	90	81	89	4	34.5	18.0
70	70	92	83	91	4	42.0	18.0
75	75	97	88	99	4	42.0	18.0
80	80	105	95	104	4	41.8	18.2
85	85	110	100	109	4	41.8	18.2
90	90	115	105	114	4	46.8	18.2
95	95	120	110	119	4	47.8	17.2
100	100	125	115	124	4	47.8	17.2